


OGCU₂ CHIN-UP

PRODUCT GUIDE

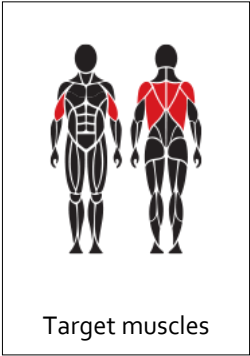

Target muscles

PRODUCT FEATURES

- Effective and safe exercise equipment
- 2 heights
- Structural black bar for grip
- Maintenance-free
- Can be installed on a movable platform

COLOR OPTIONS

The product comes as standard in RAL Classic colors:
RAL 5012 (blue), RAL 3020 (red), RAL 6018 (green)
RAL 1017 (yellow), or RAL 7024 (grey).



Other RAL colors are available at an additional cost.

OGCU₂ CHIN-UP

D I M E N S I O N S

Length	230 mm
Width	2160 mm
Height	1720 / 2320 mm
Equipment weight	70 kg

M A T E R I A L

Metal parts	Steel
Tube Strengths	3-6 mm
Coating solution	Zink and powder coating electropolishing

C O U N T R Y / S T A N D A R D

Country of manufacture	Finland
Standard	EN16630

B A S E O P T I O N S

A. Concrete	Surface mounting to concrete
B. Platform	Installed on movable platform



F O U N D A T I O N

Max. free fall height 1320 mm. Safety area must be equipped with impact damping surface such as lawn, artificial grass + padding (22mm) or safety tiles (40mm).

Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:
installation instructions, maintenance, usage info.
Contact: info@omnigym.com

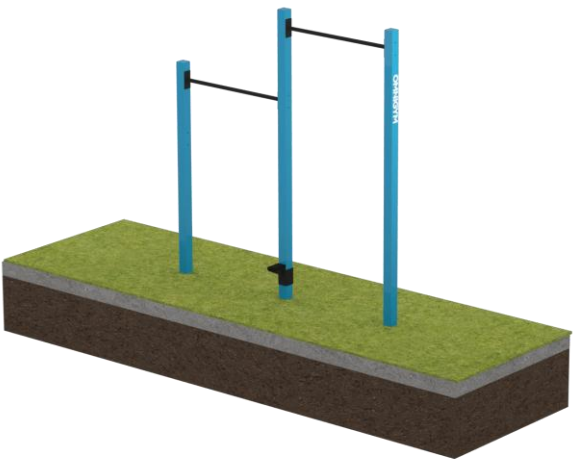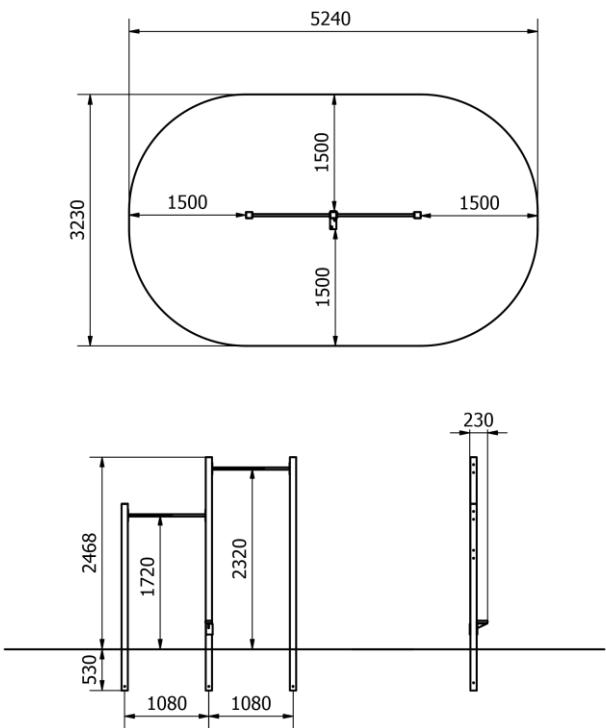

EN16630