
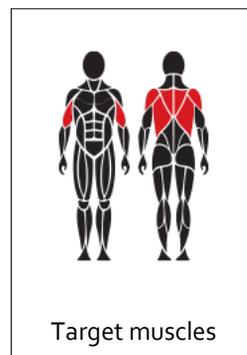


OGCU₁ CHIN-UP

PRODUCT GUIDE

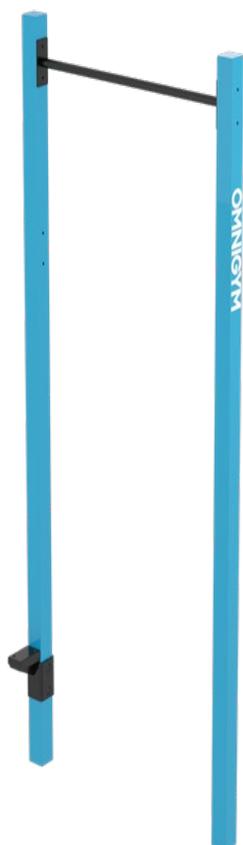

Target muscles

PRODUCT FEATURES

- Effective and safe exercise equipment
- Structural black bar for grip
- Maintenance-free

COLOR OPTIONS

The product comes as standard in RAL Classic colors: RAL 5012 (blue), RAL 3020 (red), RAL 6018 (green), RAL 1017 (yellow), or RAL 7024 (grey).



Other RAL colors are available at an additional cost.

OGCU₁ CHIN-UP

D I M E N S I O N S

Length	230 mm
Width	1160 mm
Height	2468 mm (bar 2320 mm)
Equipment weight	55 kg

M A T E R I A L

Metal parts	Steel
Tube strengths	3-6 mm
Coating solution	Zink and powder coating

C O U N T R Y / S T A N D A R D

Country of manufacture	Finland
Standard	EN16630

B A S E O P T I O N S

Concrete	Deep foundation mounting
----------	--------------------------

F O U N D A T I O N

Max. free fall height 1320 mm. Safety area must be equipped with impact damping surface such as lawn, artificial grass + padding (22mm) or safety tiles (40mm).



Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:

installation instructions, maintenance, usage info.

Contact: info@omnigym.com

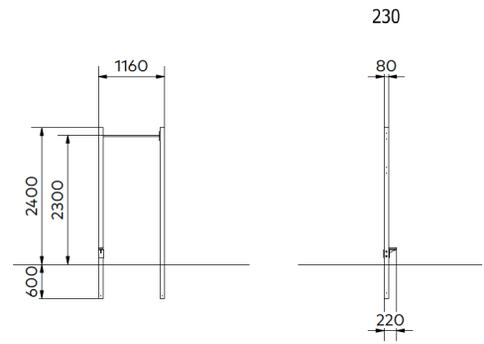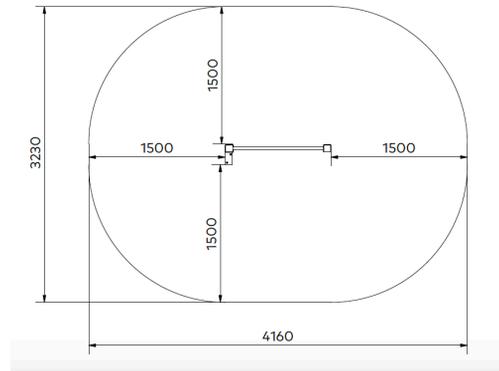

EN16630