


OGCU₃ CHIN-UP

PRODUCT GUIDE

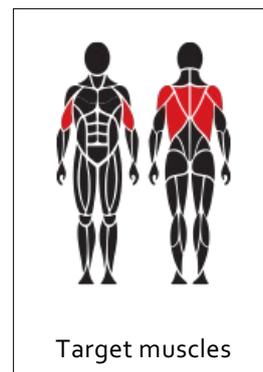

PRODUCT FEATURES

- Effective and safe exercise equipment
- 3 heights
- Structural black bar for grip
- Maintenance-free

COLOR OPTIONS

The product comes as standard in RAL Classic colors:
RAL 5012 (blue), RAL 3020 (red), RAL 6018 (green)
RAL 1017 (yellow), or RAL 7024 (grey).



Other RAL colors are available at an additional cost.

OGCU₃ CHIN-UP

D I M E N S I O N S

| | |
|------------------|-------------------------------------|
| Length | 230 mm |
| Width | 3320 mm |
| Height | 2468 mm (bar 1220 / 1720 / 2320 mm) |
| Equipment weight | 87 kg |

M A T E R I A L

| | |
|------------------|-------------------------|
| Metal parts | Steel |
| Tube strengths | 3-6 mm |
| Coating solution | Zink and powder coating |

C O U N T R Y / S T A N D A R D

| | |
|------------------------|---------|
| Country of manufacture | Finland |
| Standard | EN16630 |

B A S E O P T I O N S

| | |
|----------|--------------------------|
| Concrete | Deep foundation mounting |
|----------|--------------------------|

F O U N D A T I O N




Max. free fall height 1320 mm. Safety area must be equipped with impact damping surface such as lawn, artificial grass + padding (22mm) or safety tiles (40mm).

Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:
installation instructions, maintenance, usage info.

Contact: info@omnigym.com

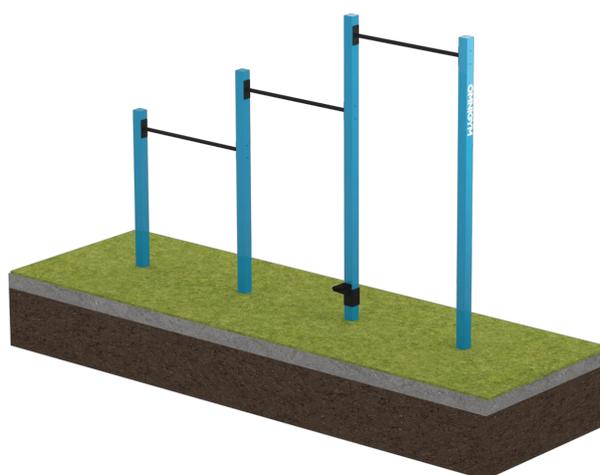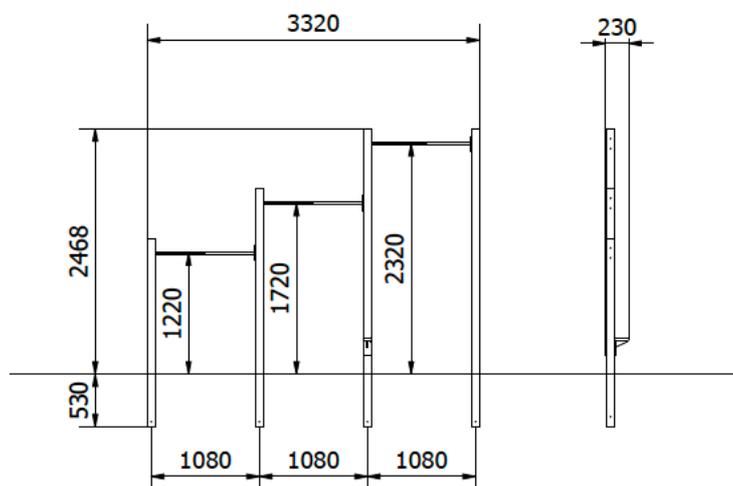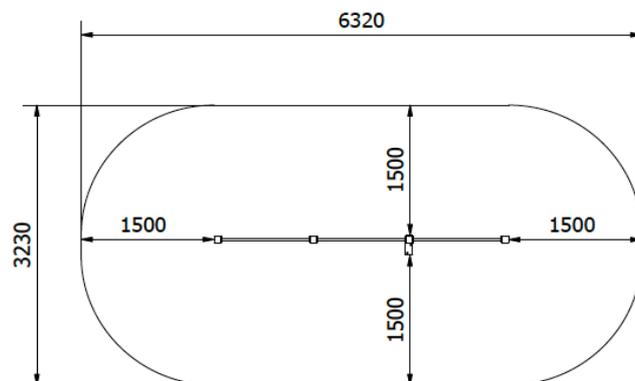

EN16630