


OGPB₃₀₀ PLYO BOX

PRODUCT GUIDE

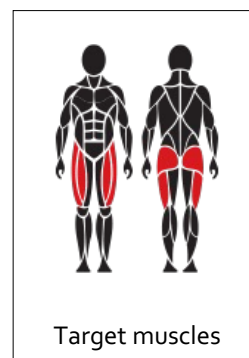

PRODUCT FEATURES

- Effective and safe exercise equipment
- Anti-slip surface
- Maintenance-free
- Can be installed on a movable platform

COLOR OPTIONS

The product comes as standard in Black RAL 7021

OGPB₃₀₀ PLYO BOX

D I M E N S I O N S

Length	595 mm
Width	750 mm
Height	300 mm
Equipment weight	35 kg

M A T E R I A L

Metal parts	Steel
Tube strengths	3-6 mm
Coating solution	Zink and powder coating
Surface solution	Polyurethane coating

C O U N T R Y / S T A N D A R D

Country of manufacture	Finland
Standard	EN16630

B A S E O P T I O N S

A. Concrete	Surface mounting to concrete
B. Platform	Installed on movable platform

F O U N D A T I O N

For example: artificial turf or moldable safety platform



Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:

installation instructions, maintenance, usage info.


Contact: info@omnigym.com

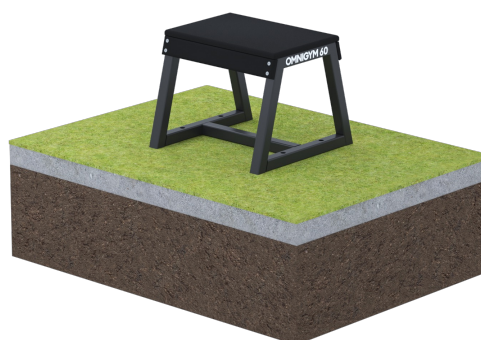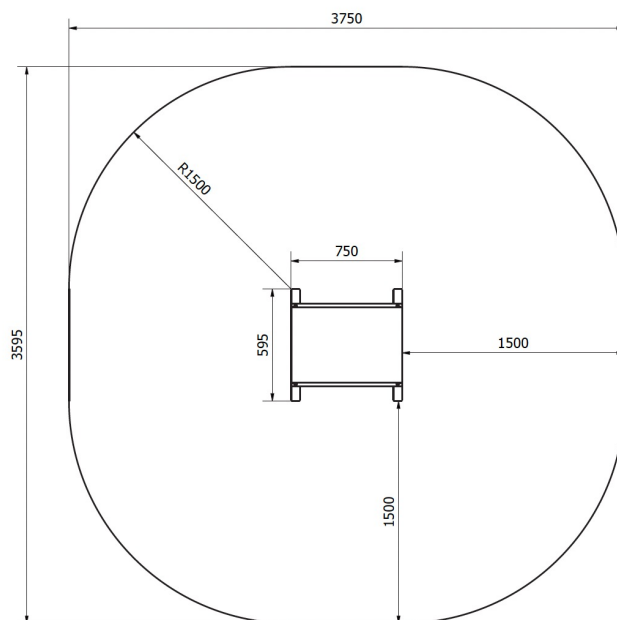

EN16630

OGPB45o PLYO BOX

PRODUCT GUIDE

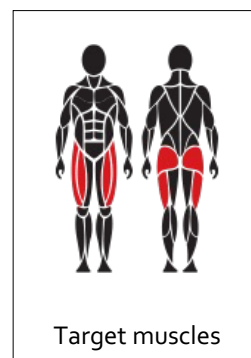

PRODUCT FEATURES

- Effective and safe exercise equipment
- Anti-slip surface
- Maintenance-free
- Can be installed on a movable platform

COLOR OPTIONS

The product comes as standard in Black RAL 7021

OGPB450 PLYO BOX

D I M E N S I O N S

Length	675 mm
Width	750 mm
Height	450 mm
Equipment weight	40 kg

M A T E R I A L

Metal parts	Steel
Tube strengths	3-6 mm
Coating solution	Zink and powder coating
Surface solution	Polyurethane coating

C O U N T R Y / S T A N D A R D

Country of manufacture	Finland
Standard	EN16630

B A S E O P T I O N S

A. Concrete	Surface mounting to concrete
B. Platform	Installed on movable platform

F O U N D A T I O N

For example: artificial turf or moldable safety platform



Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:

installation instructions, maintenance, usage info.


Contact: info@omnigym.com

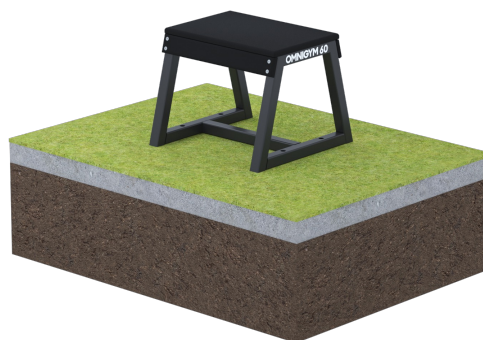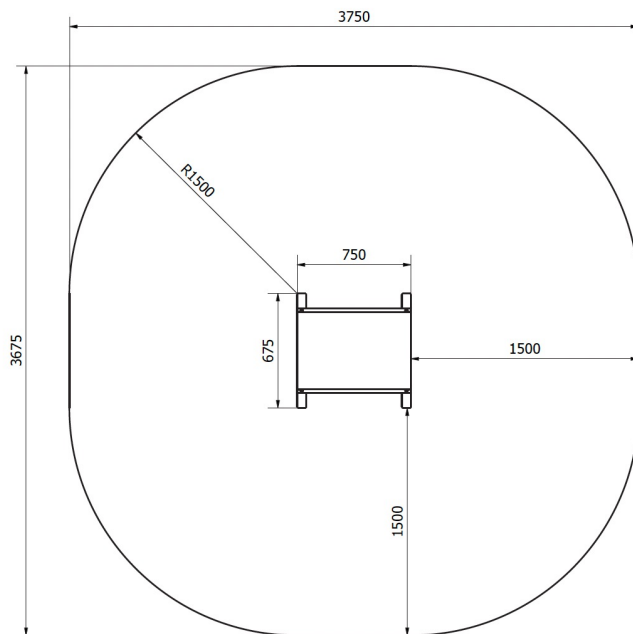

EN16630

OGPB600 PLYO BOX

PRODUCT GUIDE

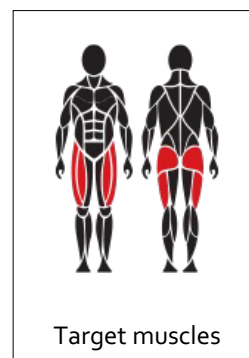

PRODUCT FEATURES

- Effective and safe exercise equipment
- Anti-slip surface
- Maintenance-free
- Can be installed on a movable platform

COLOR OPTIONS

The product comes as standard in Black RAL 7021

OGPB600 PLYO BOX

D I M E N S I O N S

Length	755 mm
Width	750 mm
Height	600 mm
Equipment weight	45 kg

M A T E R I A L

Metal parts	Steel
Tube strengths	3-6 mm
Coating solution	Zink and powder coating
Surface solution	Polyurethane coating

C O U N T R Y / S T A N D A R D

Country of manufacture	Finland
Standard	EN16630

B A S E O P T I O N S

A. Concrete	Surface mounting to concrete
B. Platform	Installed on movable platform

F O U N D A T I O N

For example: artificial turf or moldable safety platform



Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:

installation instructions, maintenance, usage info.


Contact: info@omnigym.com

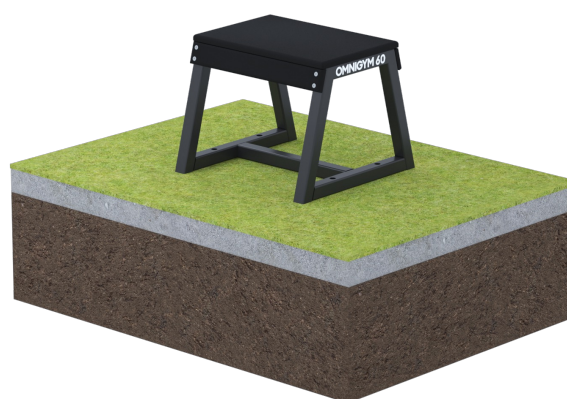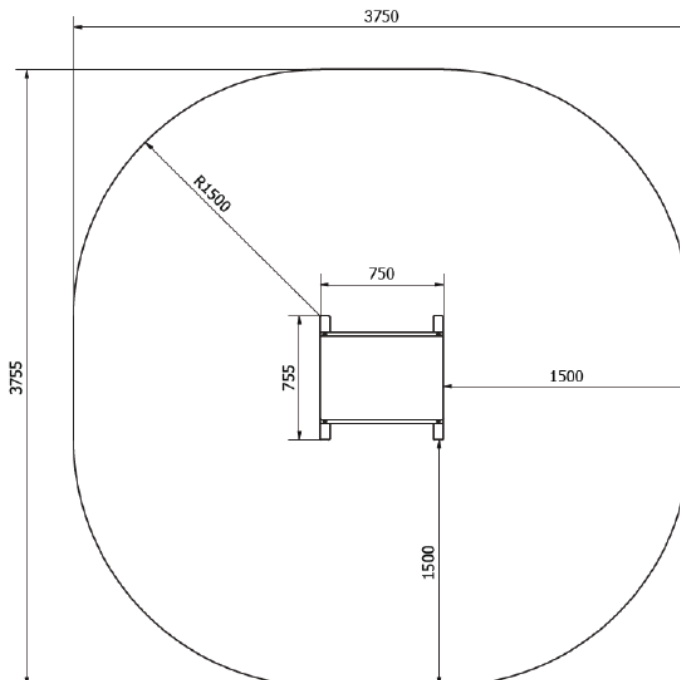

EN16630

OGPB750 PLYO BOX

PRODUCT GUIDE

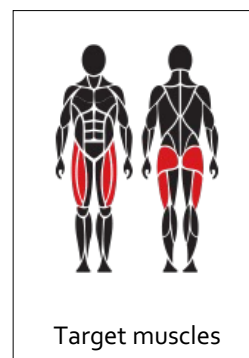

PRODUCT FEATURES

- Effective and safe exercise equipment
- Anti-slip surface
- Maintenance-free
- Can be installed on a movable platform

COLOR OPTIONS

The product comes as standard in Black RAL 7021

OGPB750 PLYO BOX

D I M E N S I O N S

Length	835 mm
Width	750 mm
Height	750 mm
Equipment weight	50 kg

M A T E R I A L

Metal parts	Steel
Tube strengths	3-6 mm
Coating solution	Zink and powder coating
Surface solution	Polyurethane coating

C O U N T R Y / S T A N D A R D

Country of manufacture	Finland
Standard	EN16630

B A S E O P T I O N S

A. Concrete	Surface mounting to concrete
B. Platform	Installed on movable platform

F O U N D A T I O N

For example: artificial turf or moldable safety platform



Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:

installation instructions, maintenance, usage info.


Contact: info@omnigym.com

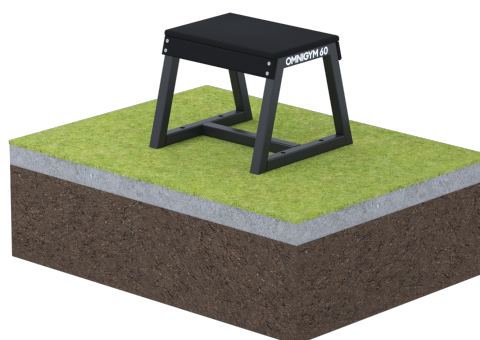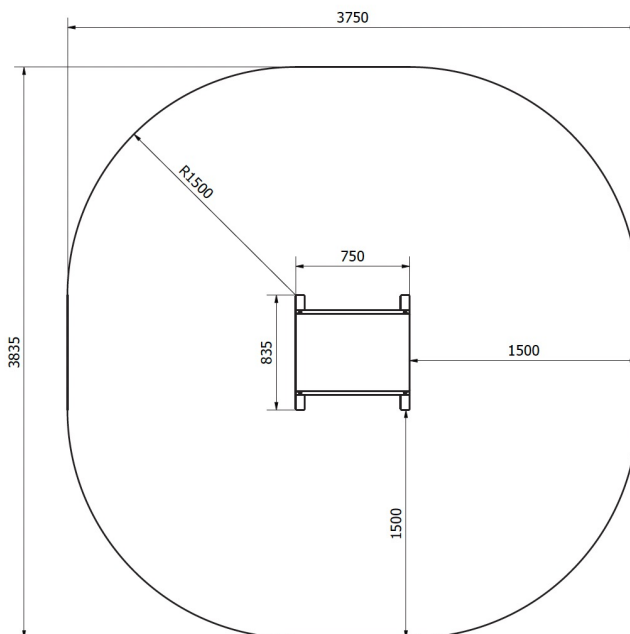

EN16630

OGPB1000 PLYO BOX

PRODUCT GUIDE

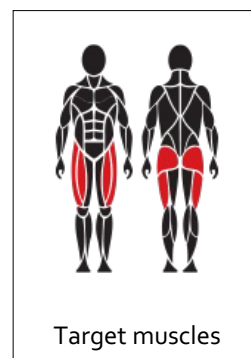

PRODUCT FEATURES

- Effective and safe exercise equipment
- Anti-slip surface
- Maintenance-free
- Can be installed on a movable platform

COLOR OPTIONS

The product comes as standard in Black RAL 7021

OGPB1000 PLYO BOX

D I M E N S I O N S

Length	970 mm
Width	750 mm
Height	1000 mm
Equipment weight	60 kg

M A T E R I A L

Metal parts	Steel
Tube strengths	3-6 mm
Coating solution	Zink and powder coating
Surface solution	Polyurethane coating

C O U N T R Y / S T A N D A R D

Country of manufacture	Finland
Standard	EN16630

B A S E O P T I O N S

A. Concrete	Surface mounting to concrete
B. Platform	Installed on movable platform

F O U N D A T I O N

For example: artificial turf or moldable safety platform



Concrete min 120 mm below equipment

Ground frost insulation, thickness based on the ground

Instruction guide included in delivery:

installation instructions, maintenance, usage info.

Contact: info@omnigym.com

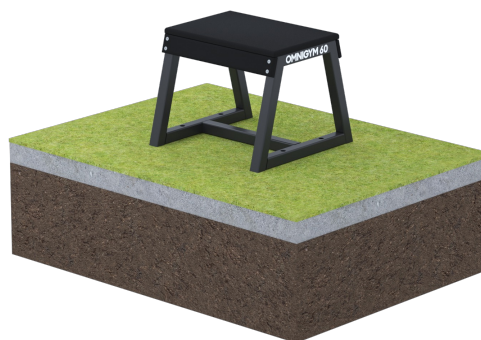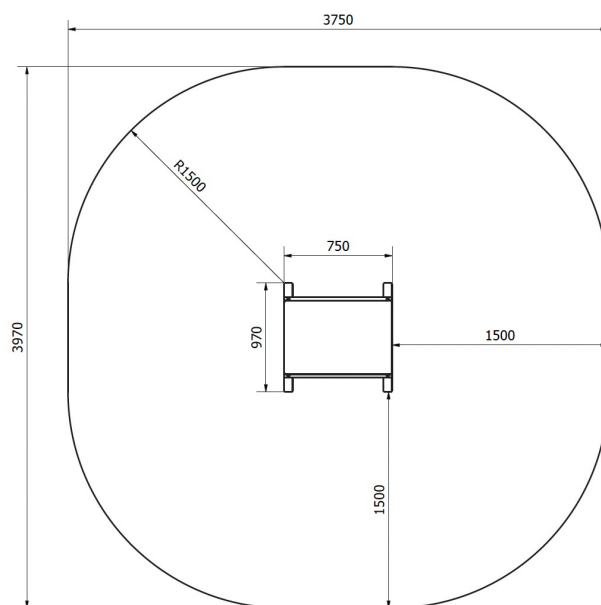

EN16630